

IceCube Flashers

Dawn Williams
University of Alabama
IceCube Bootcamp 2017
Madison, WI

IceCube Detector references


- **The IceCube Neutrino Observatory: Instrumentation and Online Systems**
 - <https://arxiv.org/abs/1612.05093>
- **Calibration and Characterization of the IceCube Photomultiplier Tube**
 - <https://arxiv.org/abs/1002.2442>
- **The IceCube Data Acquisition System: Signal Capture, Digitization, and Timestamping**
 - <https://arxiv.org/abs/0810.4930>
- **Measurement of South Pole ice transparency with the IceCube LED calibration system**
 - <https://arxiv.org/abs/1301.5361>

IceCube

Strings are numbered 1-86

DOMs are numbered 1-60, top to bottom (in ice)

Surface (IceTop) DOMs are numbered 61-64, not used in flasher analysis


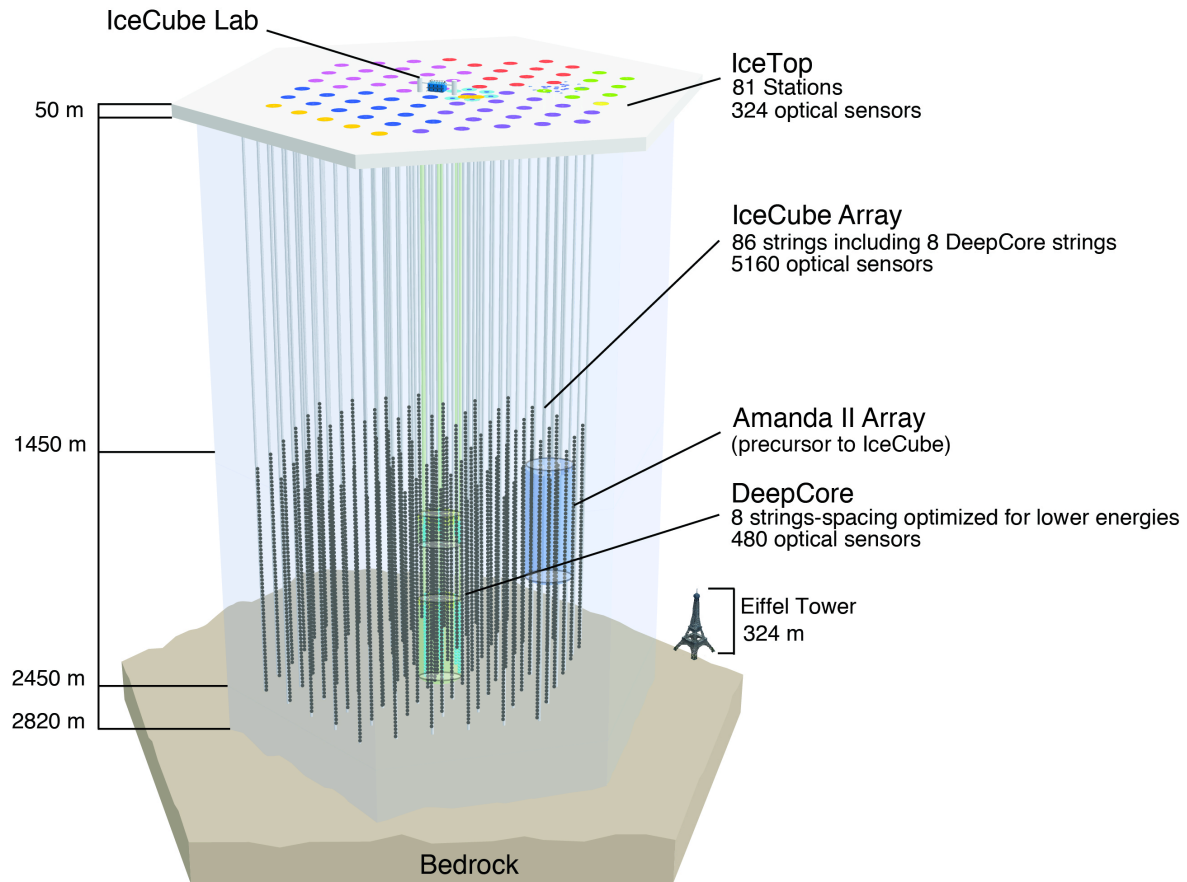


Vocabulary


- DOM = digital optical module
 - Basic sensor unit
- String = cable with 60 DOMs
 - 86 strings in final detector
- IceTop = surface detector
- InIce = all strings
- DeepCore = closely spaced center strings



IceCube Strings

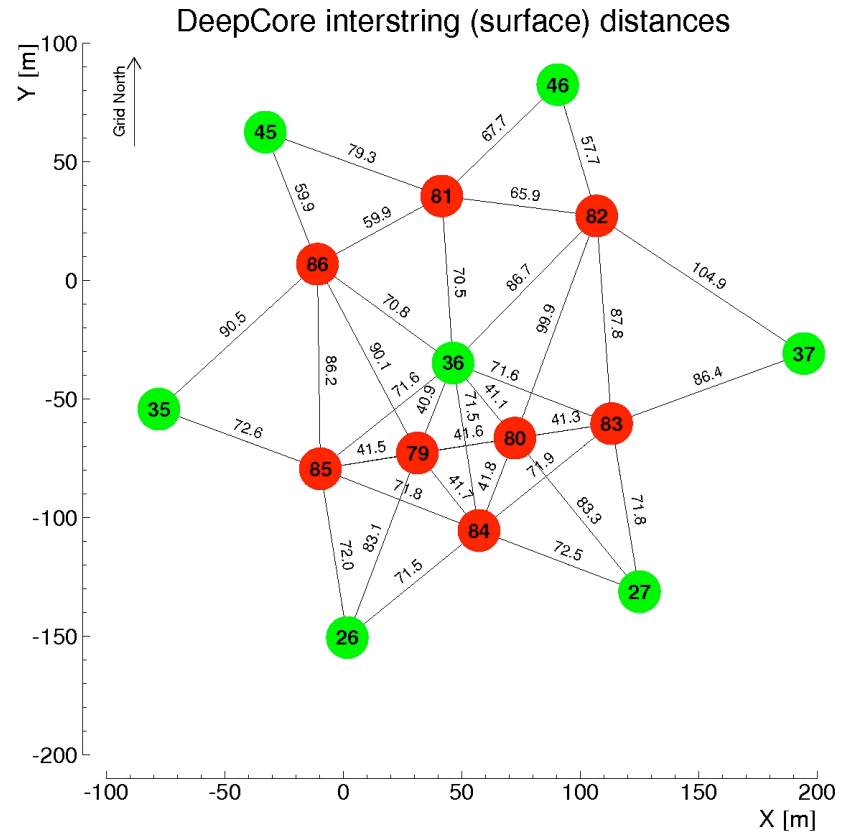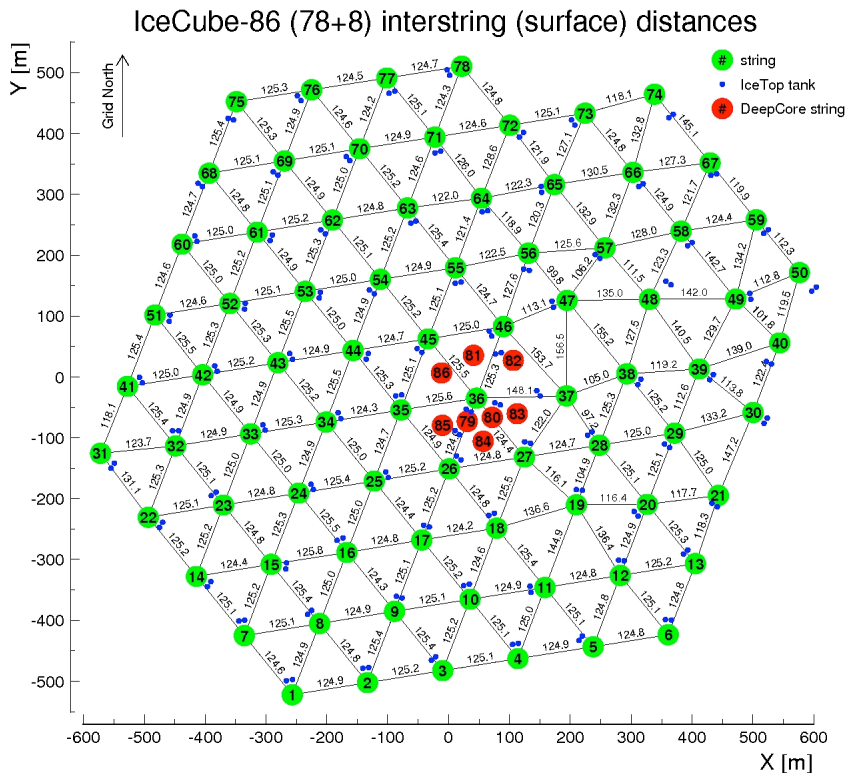

IceCube Digital Optical Module (DOM)


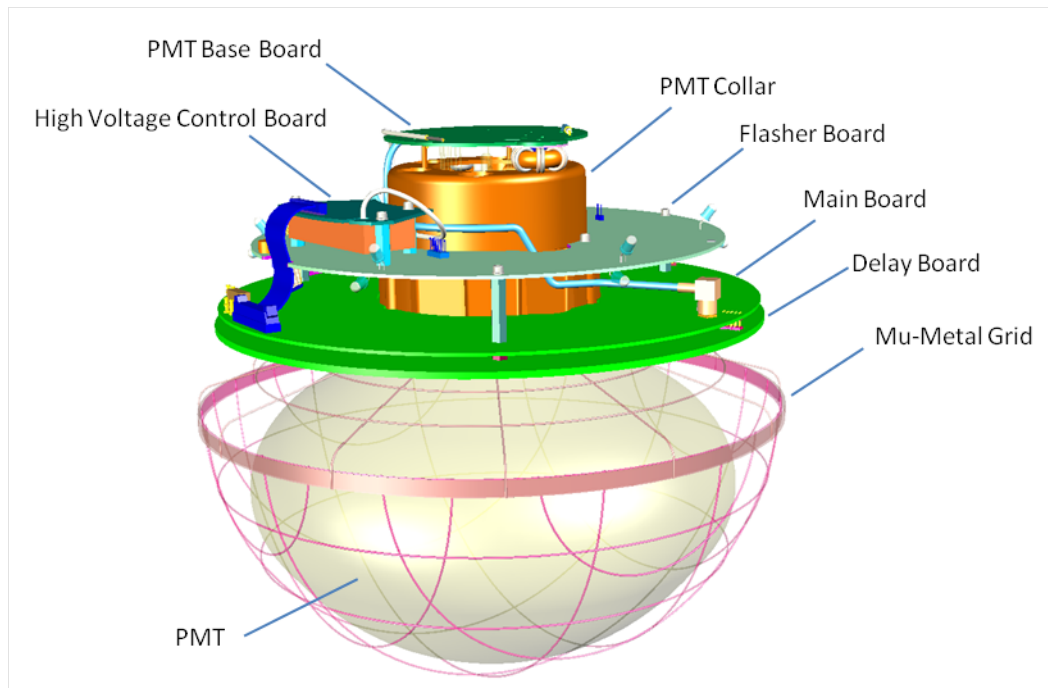


Every DOM in IceCube is equipped with flasher LEDs

This gives us a controlled light source at every location in the detector

Vocabulary

- Photomultiplier tube or PMT = light detector
- HV = high voltage
- Photoelectron: an electron ejected from a metal surface in the PMT by a photon
- Mainboard = digitizing electronics
- ATWD = analog transient waveform digitizer
 - 128 samples, 3 ns per sample
- FADC = fast analog to digital converter
- Waveform = digitized current pulse
- Timestamp = time a waveform was recorded
- Flashers = onboard LEDs for calibration

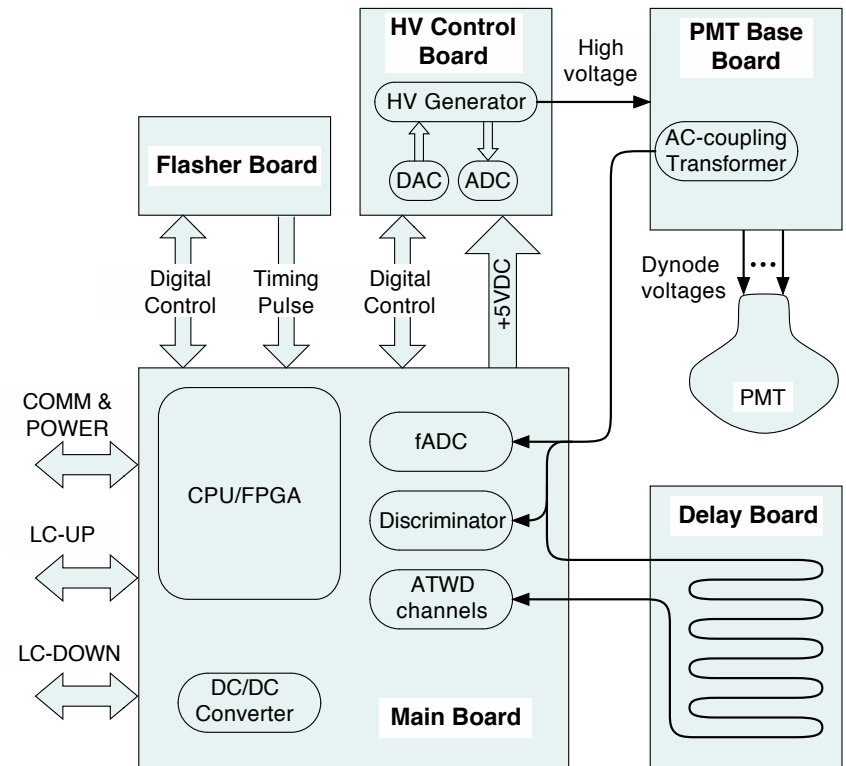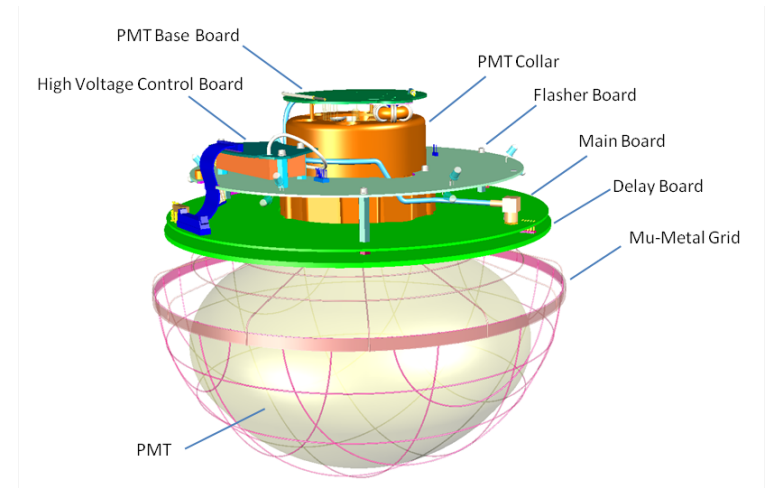

IceCube PMT



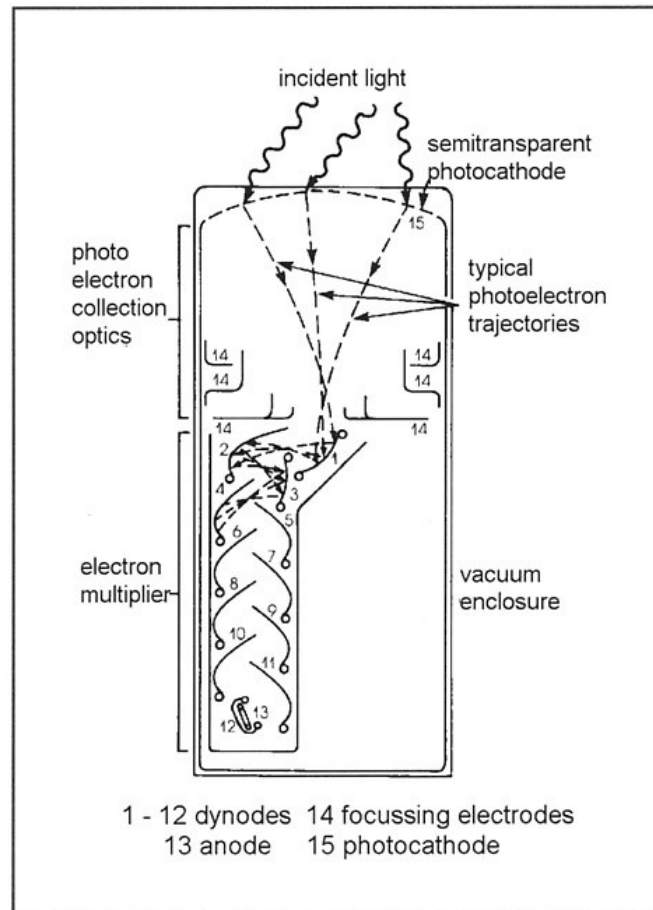



Fig. 4.1 Schematic of a photomultiplier tube.

DOM Output: single photoelectron

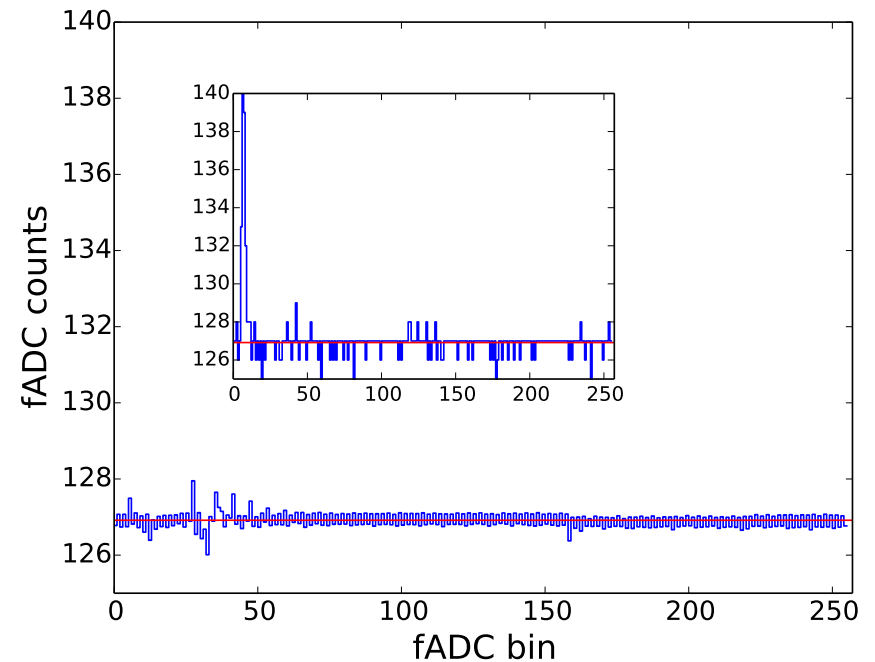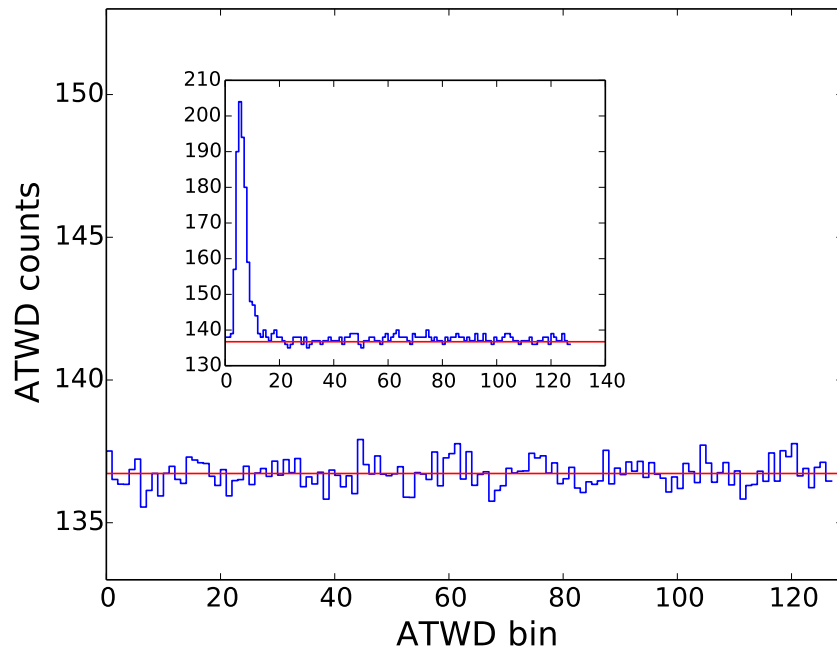


This is what we record when light hits the DOM: a waveform

DOM output: complex waveform

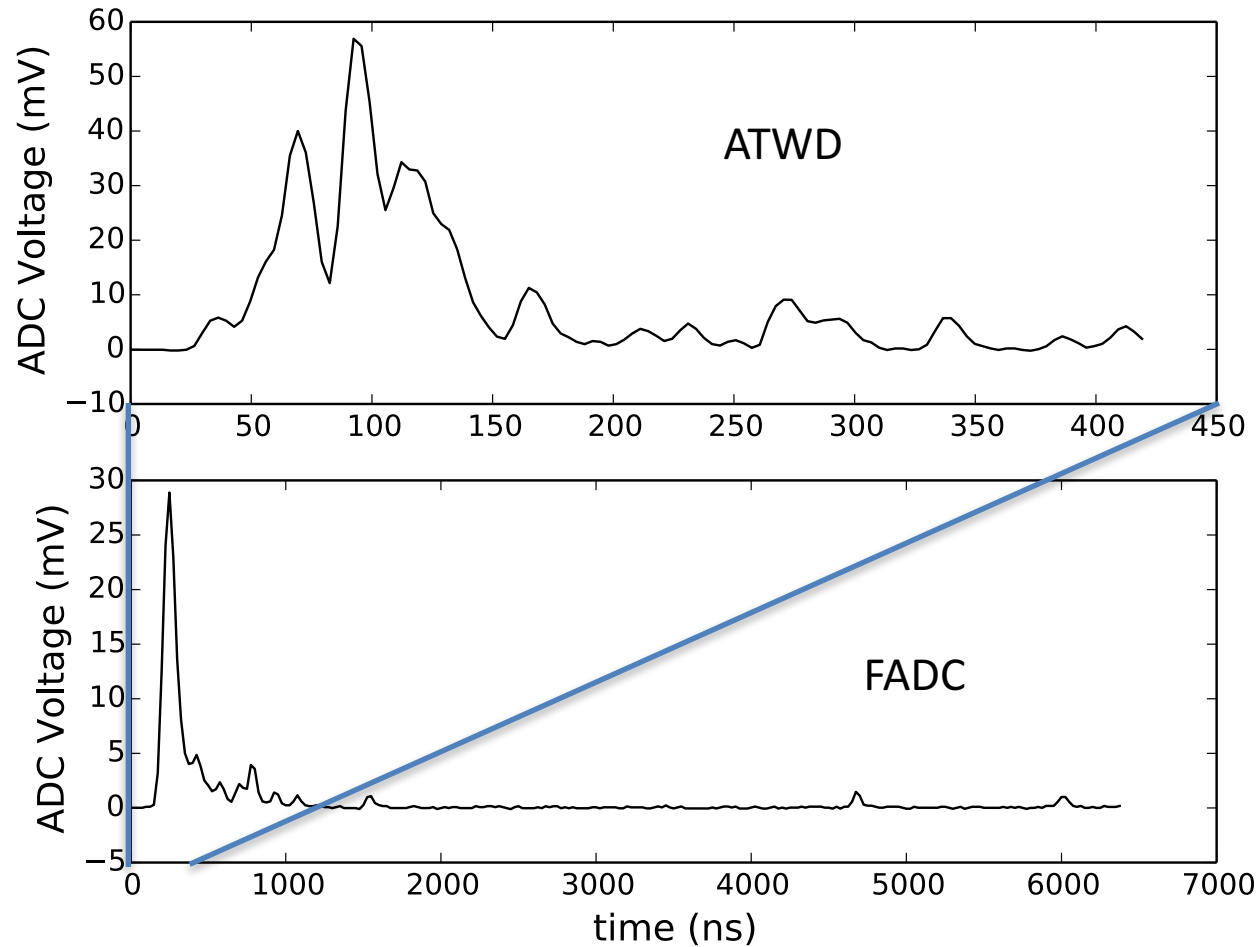


Vocabulary

- Hit = single DOM sees light (threshold = 0.25 PE)
- Local coincidence = neighboring DOMs see light within a certain time window
- Hard Local Coincidence (HLC) = no information is sent on unless local coincidence condition is met
- Soft Local Coincidence (SLC) = only minimal information is sent on unless local coincidence condition is met
- These decisions are all made in the ice by the onboard electronics

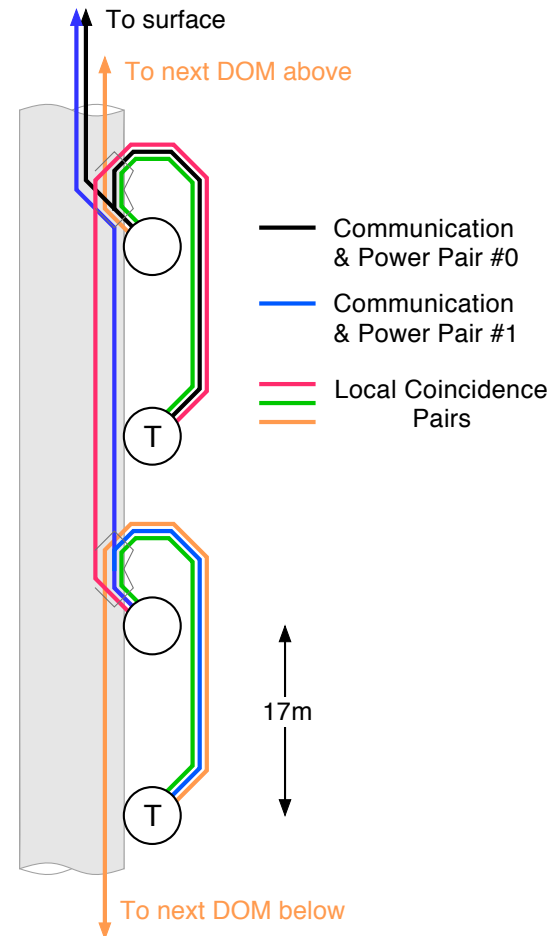


Vocabulary

- Trigger = multiple DOMs hit in a certain pattern or time window
 - Simple majority (SMT) = some number of DOMs hit, currently 8, i.e. SMT8
 - Calibration trigger = flashers
 - Minimum bias/minbias trigger = capture whatever is in the detector regardless of pattern
 - Many others

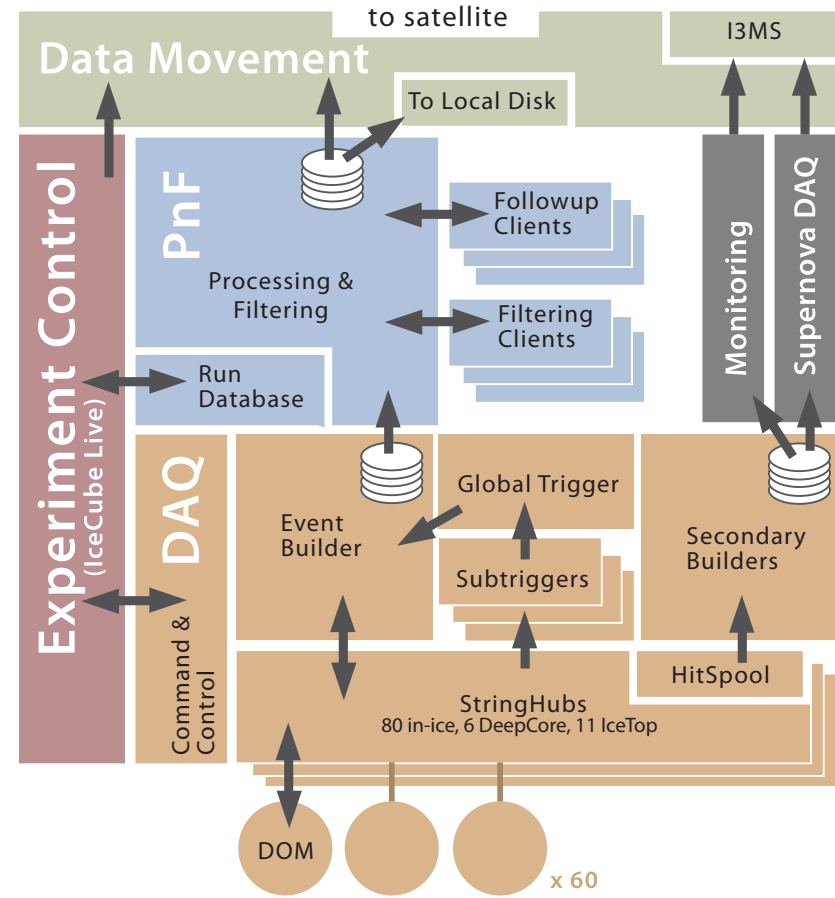


Vocabulary

- Event = all information captured within a certain time window around a trigger
 - An event may have multiple triggers
- Event Builder = software that constructs events
- Processing and filtering (PNF) = software that runs online data reduction
- Online = realtime data processing
- Offline = non-realtime data processing

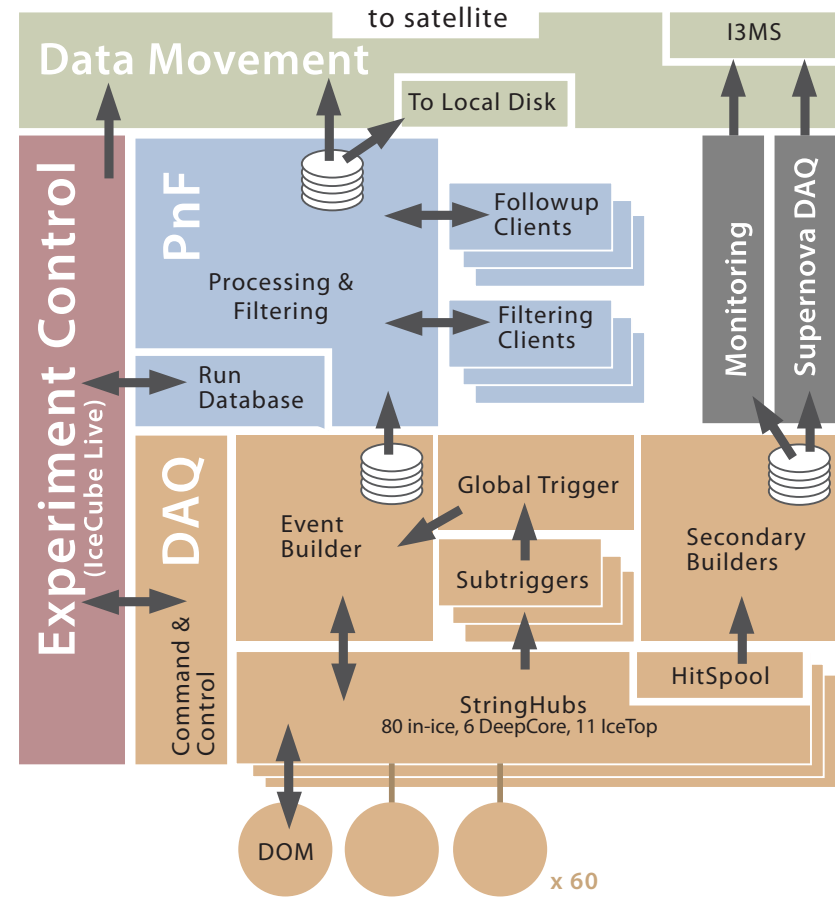

An IceCube neutrino (“Big Bird”)

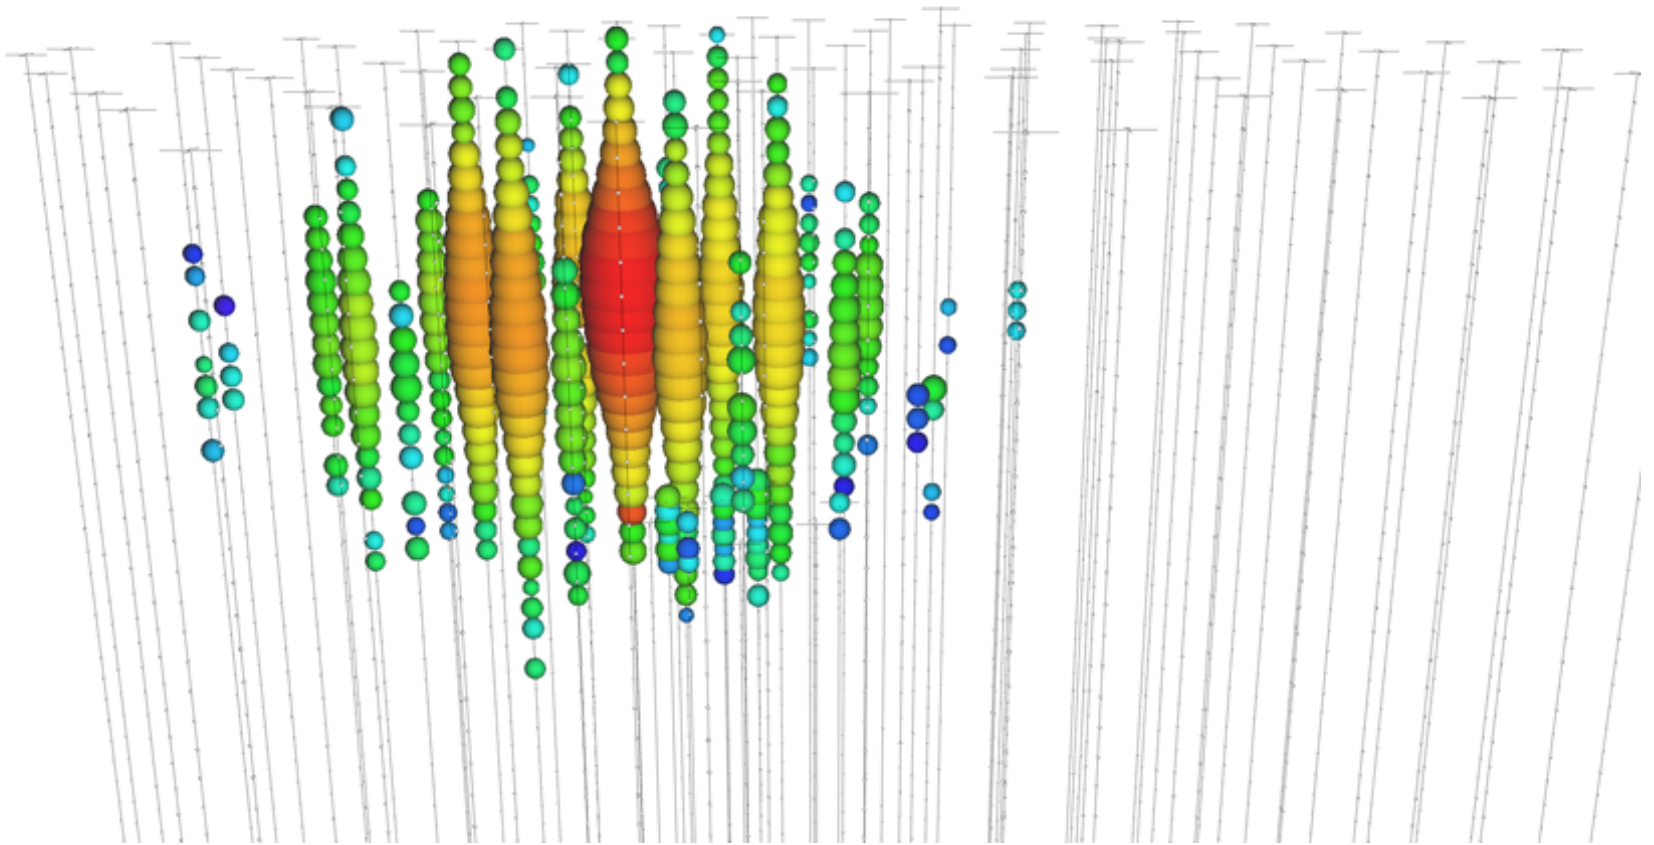


Sources of light in the ice



- Occasional glowing due to the DOM HV supply (?)
- Dark noise – mostly in the glass, radioactive decay, scintillation (hundreds of Hz per DOM)
- Cosmic ray muons (several kHz)
- Products from neutrino interactions
- Artificial light sources
 - LED flashers
 - Laser “standard candle”
 - Laser lighting for the “Swedish camera”

Calibration: from photon to data

Light source



Propagation through ice

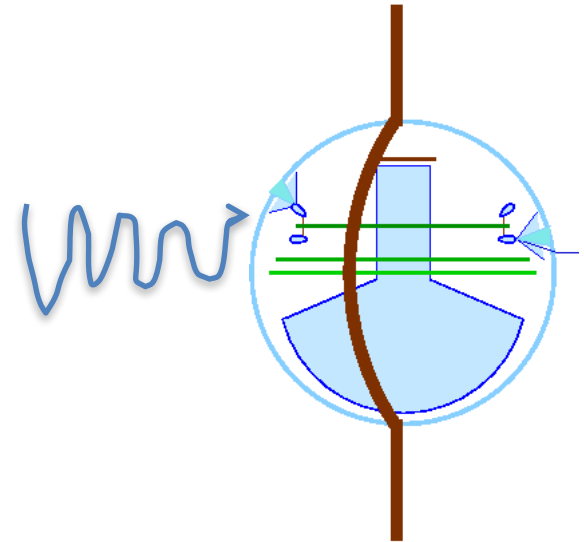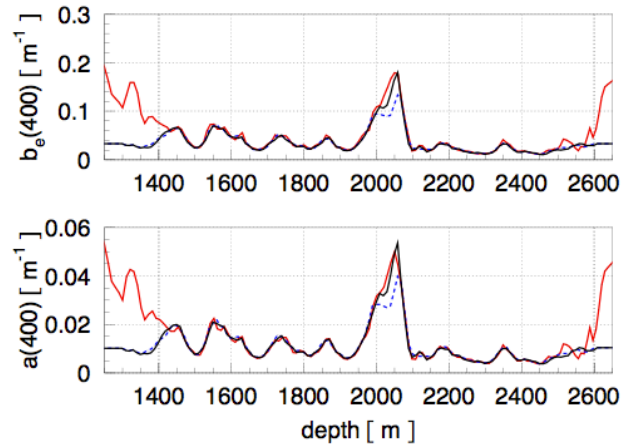


We use flashers:

- 1) To verify that DOMs are properly connected and functioning during commissioning
- 2) To verify the detector geometry
- 3) To study the optical properties of the ice
- 4) To study the response of the DOMs themselves

Flasher wiki references

- <https://wiki.icecube.wisc.edu/index.php/Flashers>
- https://wiki.icecube.wisc.edu/index.php/CDOM_Info

LED Flasher Board

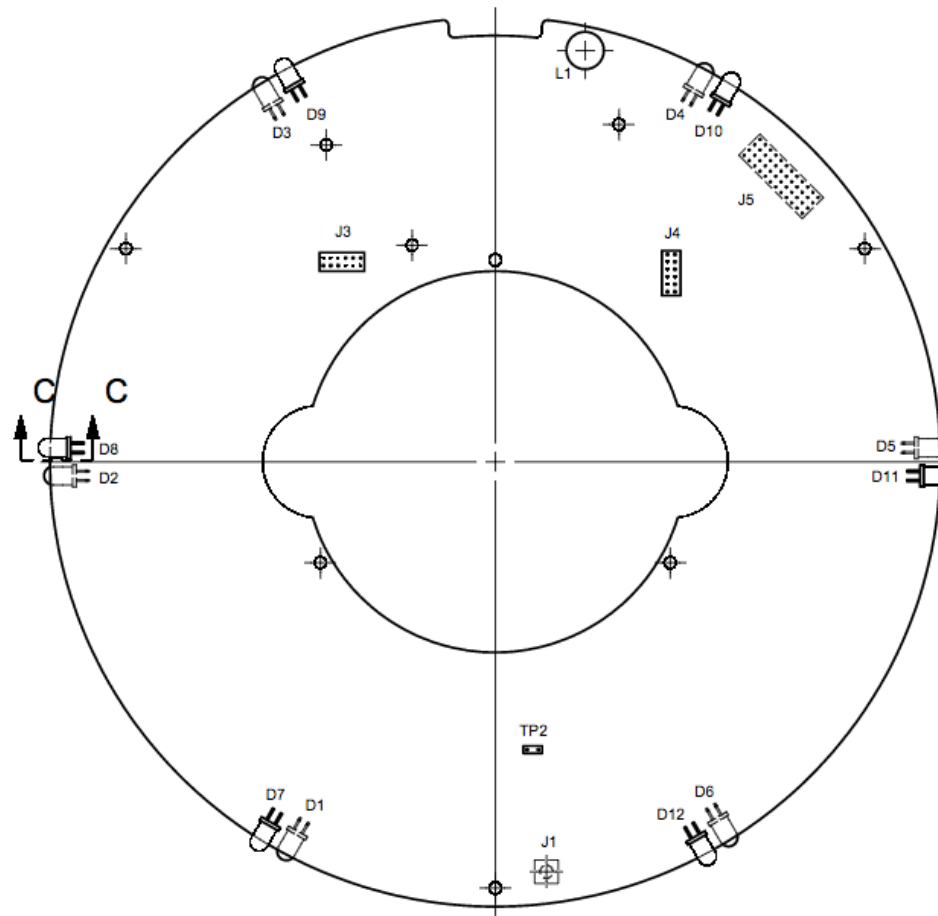

12 LEDs

Arranged in pairs,
evenly spaced 60°
apart

1&7, 2&8, 3&9,
4&10, 5&11, 6&12,
going clockwise seen
from above


1-6 are tilted, upward
at about 45° from
horizontal

7-10 are horizontal


Flasher properties

- The vast majority of IceCube LEDs are ETG-5UV405-30, nominally 405 nm wavelength, actually 399 nm, FWHM of 14 nm

Wavelength Characteristics
($T_a=25^\circ\text{C}$)

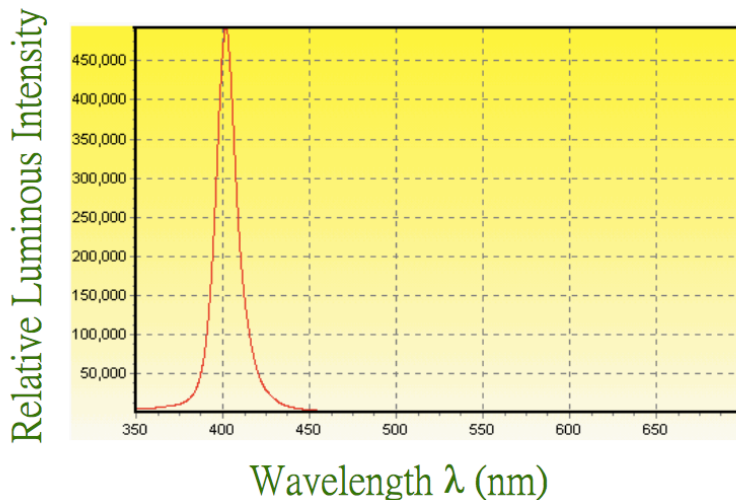


LED output spectrum at MB temperature -15°C

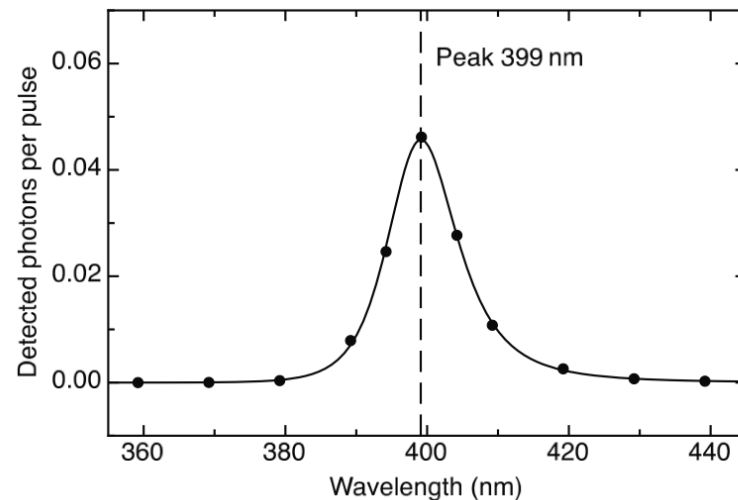

cDOMs


- 8 DOMs each on string 14 and string 79 have multiwavelength flashers called cDOMs
- For the remainder of this lesson we will use the standard 400 nm flashers

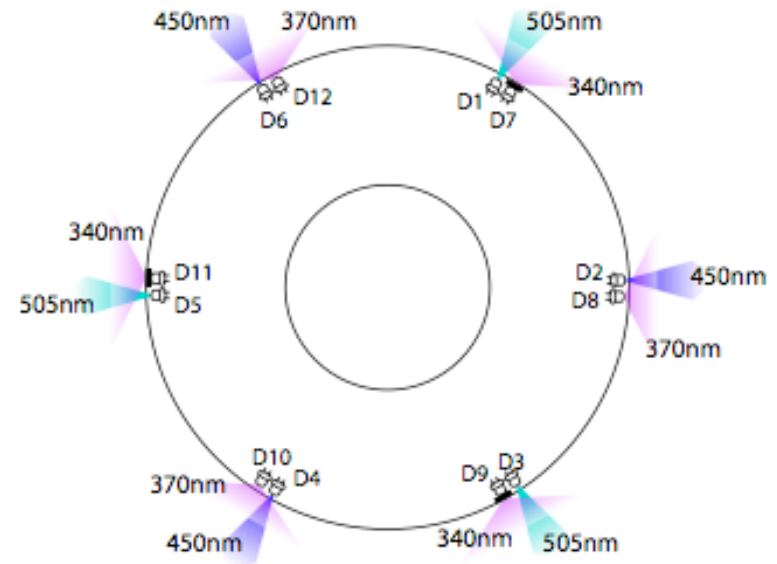

Flasher properties: Angular emission profile (beam width)

- Nominal beam width is 30° in air
- In ice, accounting for refraction from air to glass and glass to ice, the beam width is 10°
- Can be modeled as a 2-D Gaussian with $\sigma = 10^\circ$ in both directions

Beam Pattern

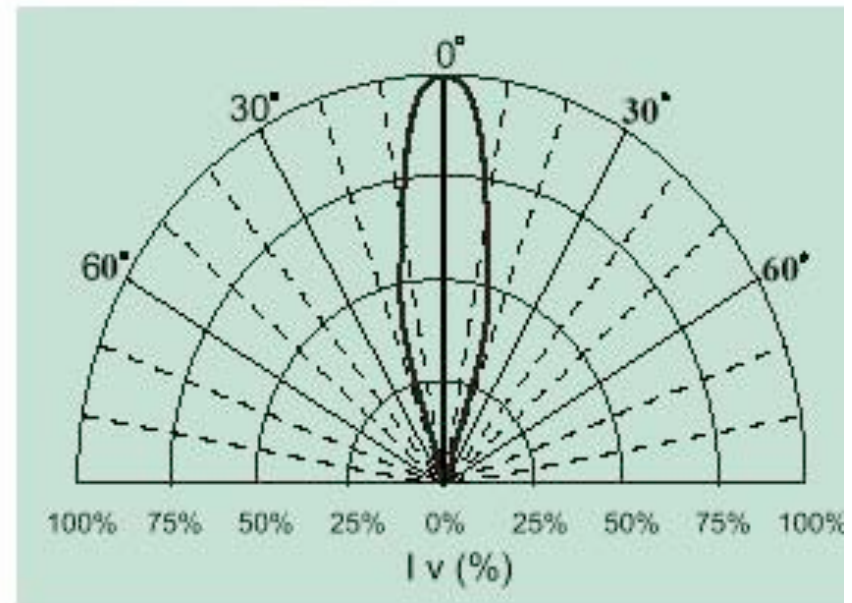


Flasher operating parameters

Parameter	Allowed values	Description
string	1 - 86	String where flashing DOM is located
DOM	1 - 60	Flashing DOM number
brightness	0 - 127	LED driver current intensity, up to 240 mA
width	0 - 127	2x duration of LED current pulse, in ns
mask	0001 - 0FFF	Hex representation of bitmask controlling which LEDs flash
rate	0 - 610	Rate of LED flashes in Hz



Flasher operation: String and DOM

- Multiple flashers can be run simultaneously
- The data acquisition system can withstand about 3x the normal background rate from muons (~70 bright flashing DOMs simultaneously)
- A typical run might have 4-6 flashers simultaneously
- It is not advised to have neighboring flashers on the same string run together
- Old DOMs (produced in 2004 and 2005) have “afterburst” properties which make them difficult to run
- Flashers cannot be synchronized using the current firmware

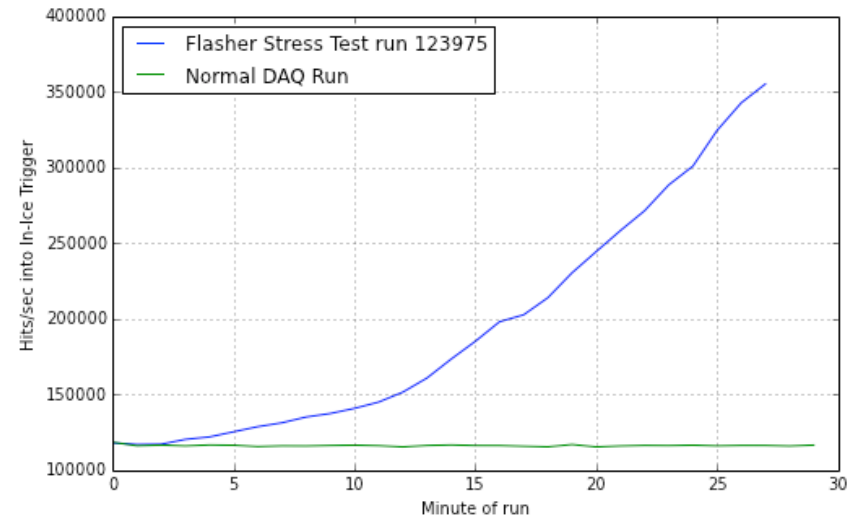

Running flashers: brightness and width


- Maximum photon output per LED is $1.17e10$ photons per flash
- With all 12 LEDs running this is about equal to a 500 TeV cascade
- The brightness and width parameters determine the photon output
 - Width: duration of driver current, effectively 10-70 ns
 - Brightness: amplitude of driver current, up to 240 mA

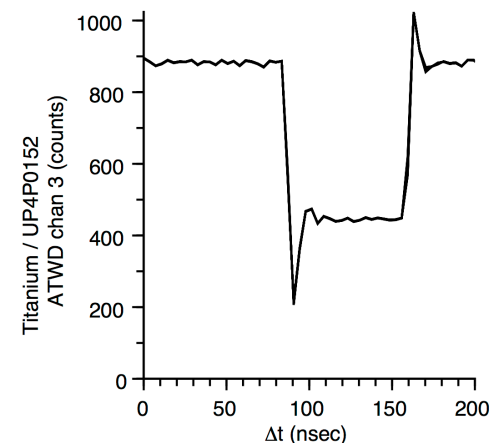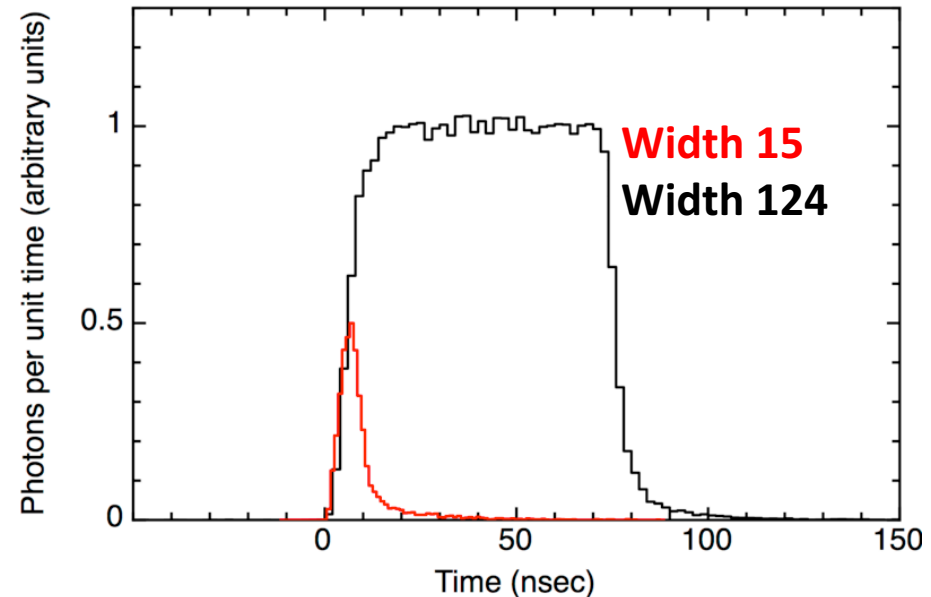

**How light
output scales
with
brightness and
width**

Flasher light output model

$$L = (0.0006753 + 0.000055927 B) \times (W + 13.8525 - 57.4525 / (1 + B / 34.426))$$

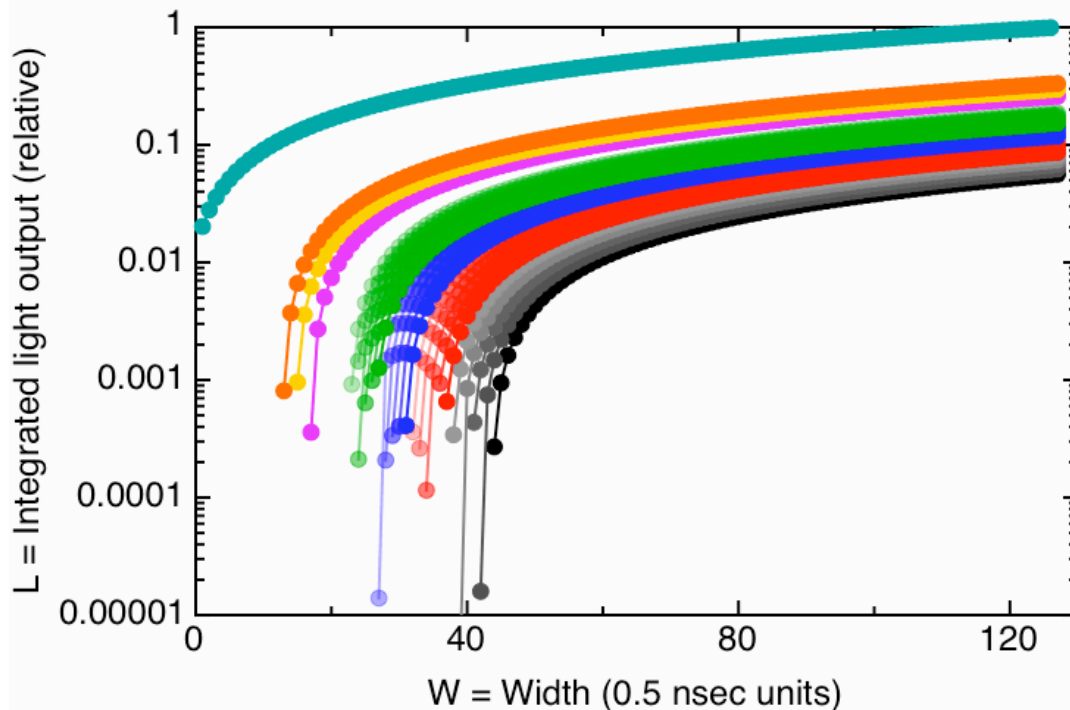


Brightness setting

- B=0
- B=1
- B=2
- B=3
- B=4
- B=5
- B=6
- B=7
- B=8
- B=9
- B=10
- B=11
- B=12
- B=13
- B=14
- B=15
- B=16
- B=17
- B=18
- B=19
- B=20
- B=30
- B=35
- B=40
- B=127

Running flashers: mask

The 12 LEDs can be run in a combination. Each LED is controlled by a bit, and the “mask” is the hex representation of the bits

Example: flash LED 7 only

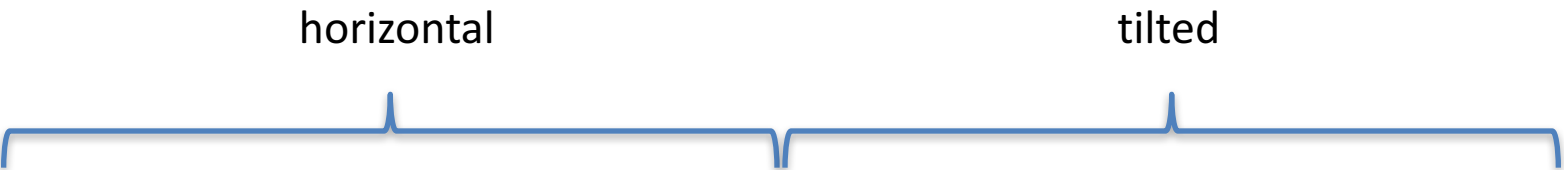

The diagram shows a horizontal line with two brackets above it. The left bracket is labeled 'horizontal' and spans LEDs 12 through 7. The right bracket is labeled 'tilted' and spans LEDs 6 through 1. Below this, a table shows the bit values for each LED.


LED	12	11	10	9	8	7	6	5	4	3	2	1
Bit	0	0	0	0	0	1	0	0	0	0	0	0

HEX mask is 0064

Running flashers: mask

The 12 LEDs can be run in a combination. Each LED is controlled by a bit, and the “mask” is the hex representation of the bits

Example: flash all tilted LEDs

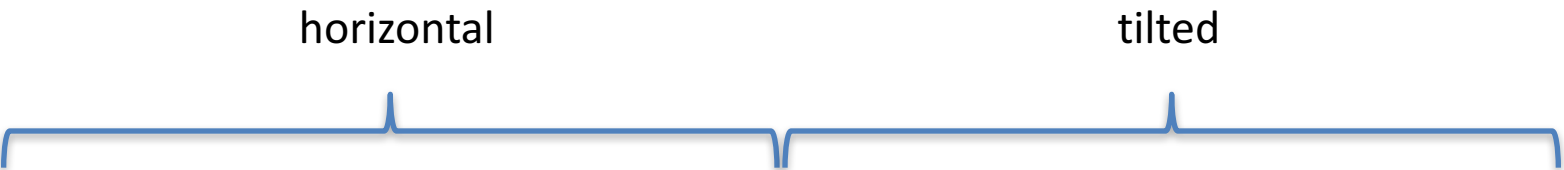


LED	12	11	10	9	8	7	6	5	4	3	2	1
Bit	0	0	0	0	0	0	1	1	1	1	1	1

HEX mask is 003f

Running flashers: mask

The 12 LEDs can be run in a combination. Each LED is controlled by a bit, and the “mask” is the hex representation of the bits

Example: flash all horizontal LEDs

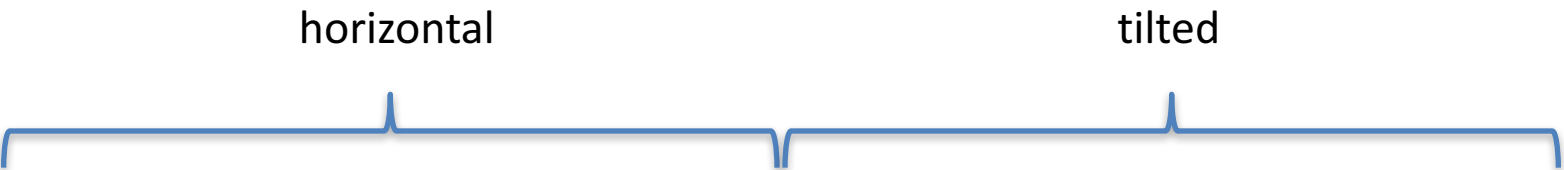


LED	12	11	10	9	8	7	6	5	4	3	2	1
Bit	1	1	1	1	1	1	0	0	0	0	0	0

HEX mask is 0fc0

Running flashers: rate

- Maximum rate is 610 Hz, lower rates are 610 Hz divided by a power of 2
- The setting in the configuration is an integer, the actual value of the rate is the next lowest value to that integer which is 610 divided by a power of 2
- So for example if the rate setting is 2, the actual rate is $1.191 \text{ Hz} = 610 \text{ Hz}/2^9$

Flasher data processing

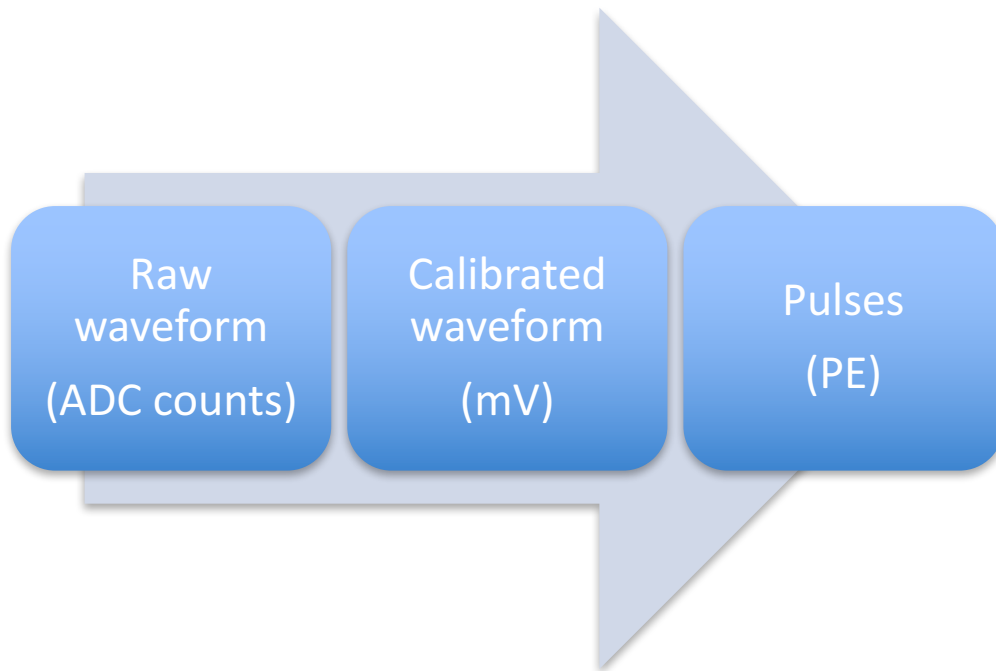

We will now look at some flasher data and do some exercises to look at the pulses detected by neighboring DOMs from a flasher.

